

-SMOKE DETECTORS SHALL BE PROVIDED ON EVERY FLOOR


ALL CONCRETE FOOTINGS TO HAVE SOLID BEARING ON COMPACTED, UNDISTURBED INORGANIC SOIL TO A SUITABLE DEPTH BELOW FROST PENETRATION.

PROJECT DATATABLE	- SINGLE FAMILY D	WELLING
Address	Proposed LOT 1 2003 Shakespeare Rd.	
Lot Size	700.897m ²	(7,544.39 ft ²)
Zoning	R1-B	
	Proposed	Allowed
Floor Area of the Principal Building	1	
2nd Storey Floor Area	121.14m ² (1,303.96 ft ²)
1st Storey Floor Area	118.34m ² (1,273.78 ft ²)	
Basement Floor Area	N/A	
Garage Area	33.66m ² (362.34 ft ²)	
Garage exemption	N/A	
Floor area, for the first and second storeys combined (maximum)	273.14 m ² (2,940.08 ft ²)	280 m ² (3,013.89
Floor area, of all floor levels combined (maximum) <i>(lot area < 669m²)</i>	273.14 m ² (2,940.08 ft ²)	420 m ² (4,520.84
Height, Storeys		1
Average grade	NIN	
Residential building (maximum)	TO REMAIN	7.60 m (24.93 ft
Storeys	2	2
Setbacks, Projections		
Front yard setback (minimum) (West)	7.76 m (25.46 ft)	7.50 m (24.61 ft
Maximum projections into front setback: • steps less than 1.7m in height	N/A	2.50m (8.20 ft)
Maximum projections into front setback: • porch	N/A	1.60m (5.25 ft)
Rear yard setback (minimum) (East)	7.80 m (25.59 ft)	7.50m (24.61 ft
Interior side yard setback (minimum) (North)*	1.60 m (5.25 ft)	2.45m (8.04 (10% of the lot
Exterior side yard setback (minimum) (South)	4.92 m (16.14 ft)	3.50m (11.48 ft)
Combined side yard setbacks (minimum)	6.53 m (21.42 ft)	4.50m (14.76 ft
Eave projections into setback (maximum)	0.16m (1.53 ft)	0.75m (2.46 ft)
Site Coverage, Parking		
Site coverage (maximum)	23.79% 166.74m ² (1,794.77 ft ²)	40.00% 280.36 m (3,017.77 1
Parking	1	1
Secondary suite floor area (incl. above)	N/A	N/A

7 Plan 11

1

PROJECT DATATABLE - SINGLE FAMILY DWELLING				
Address	Proposed LOT 2 2003 Shakespeare Rd.			
Lot Size	524.628m ² (5,647.05 ft ²)			
Zoning	R1-B			
	Proposed	Allowed		
Site Area		·		
Lot Area (Minimum)	524.63m ² (5,647.07 ft ²)	460m ² (4,951.40 ft ²)		
Lot Width		1		
Lot Width (Minimum Average)	14.33m (47.01 ft)	15.00 m (49.21 ft)		

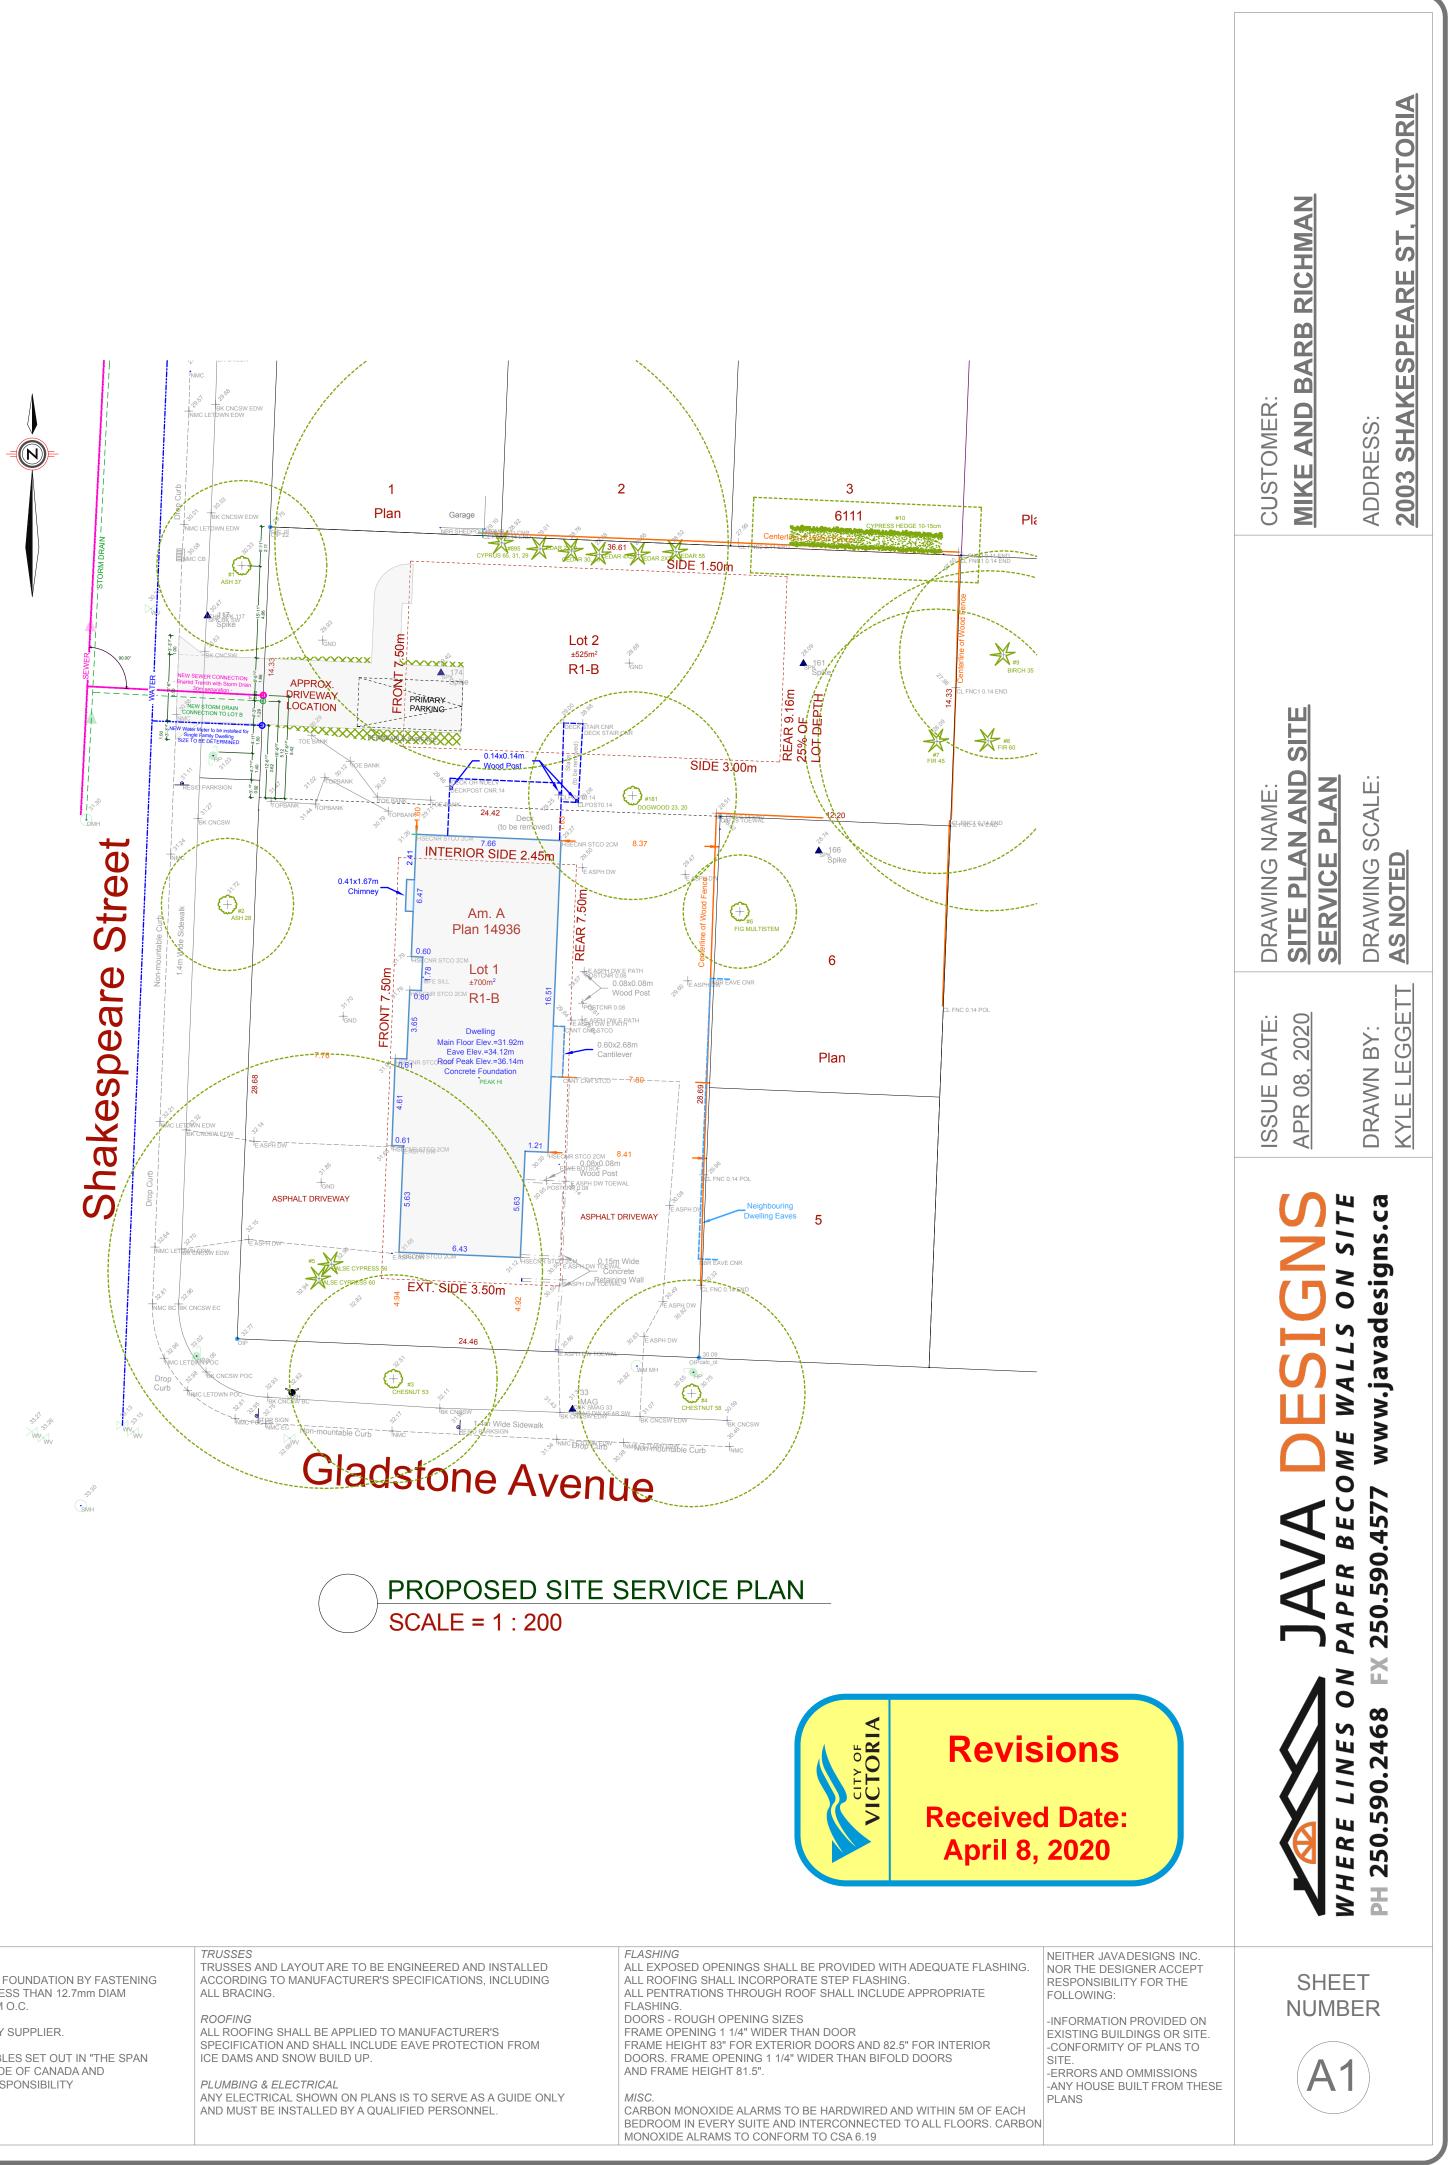

SOLID BEARING CAPACITY	LUMBER, FRAMING AND BEAMS	TF
ESIGNED BY A QUALIFIED ENGINEER.		TF
	BUILDING FRAMES TO BE ANCHORED TO FOUNDATION BY FASTENING	A
(TERIOR STEPS SHALL NOT BE LESS	SILL PLATE TO FOUNDATION WITH NOT LESS THAN 12.7mm DIAM	AL
	ANCHOR BOLTS AT NOT MORE THAN 2.4M O.C.	
		R
E MIN. COMPRESSIVE STRENGTH OF	ALL ENGINEERED BEAMS TO BE SIZED BY SUPPLIER.	AL
PLACED AND TESTED IN ACCORDANCE		SF
	ALL SPANS SHALL CONFORM TO THE TABLES SET OUT IN "THE SPAN	IC


LL SPANS SHALL CONFORM TO THE TABLES SET OUT IN "THE SPAN BOOK" AND THE NATIONAL BUILDING CODE OF CANADA AND VERIFICATIONS OF ALL SPANS IS THE RESPONSIBILITY OF THE OWNER/BUILDER.


AND SIZE OF FOOTINGS ARE TO BE DES GARAGE & CARPORT FLOORS AND EXT THAN 32 MPA

FOUNDATION CONCRETE SHALL HAVE 2900 psi (20MPa) AT 28 DAYS, MIXED, PL WITH CAN3-A438.

ALL WALLS ARE 8" CONCRETE UNLESS OTHERWISE NOTED. ALL GRADES ARE ESTIMATED ONLY AND SHALL BE ADJUSTED ON SITE. ALL WOOD IN CONTACT WITH CONCRETE SHALL BE TREATED OR SEPARATED BY A MOISTURE RESISTANT GASKET MATERIAL.


IF SOFTER CONDITIONS APPLY, THE SO

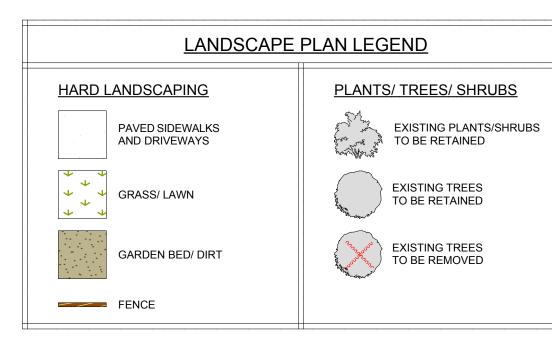

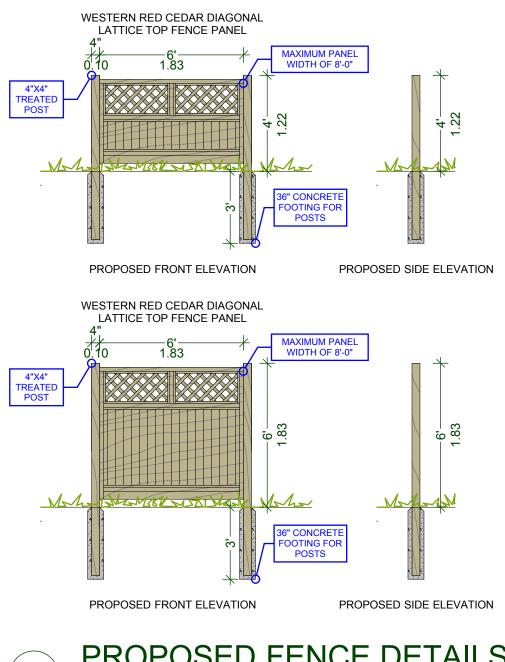

PROPOSED FENCE DETAILS SCALE: 1/4" = 1' - 0" NOTE: PROPOSED FENCE DESIGN TO MATCH EXISTING FENCING



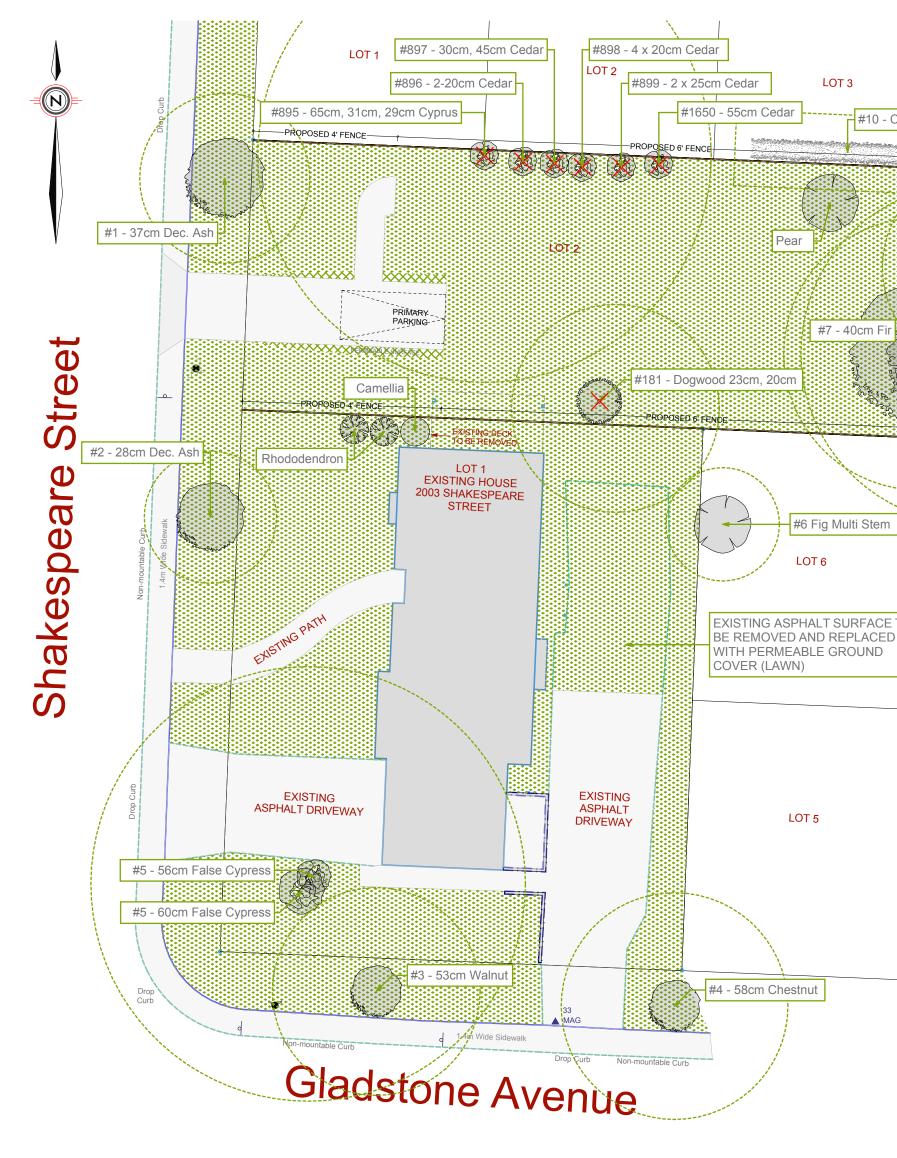

PROPOSED LANDSCAPE PLAN SCALE = 1 : 200

LOT 7 Cypress Hedge	CUSTOMER: MIKE AND BARB RICHMAN	ADDRESS: 2003 SHAKESPEARE ST, VICTORIA
HØ - 35cm Birch HØ - 60cm Fir HØ - 60cm Fir LOT 11	ISSUE DATE: DRAWING NAME: APR 08, 2020 FENCE DETAIL	DRAWN BY: DRAWING SCALE: KYLE LEGGETT AS NOTED
	SHEE NUMB A	PH 250.